



Request for Sealed Quotations for Goods

Supply & Delivery of Chemical Dosing equipment and materials for Ovitoto
and Omarassa Booster Stations

Procurement Reference No: G/RFQ/ NW-018/2023

Name of Bidder		
Contact Person		
E-mail Address		
Postal Address		
Total Amount (Excl. VAT)		
Lot 1:		
Lot 2:		
Lot 3:		
Contact Phone number	Work:	Mobile:

The Quotation/Bid Box

Att: Procurement Management Unit (+264 61 71 2015, Bids@namwater.com.na)

Namibia Water Corporation Ltd.

Private Bag 13389

176 Iscor Street, Aigams Building

Windhoek

Closing Date: Thursday, 07 July 2022 at 11h00
NO LATE BIDS WILL BE ACCEPTED!



Namibia Water Corporation Ltd.
Private Bag 13389, Windhoek, Namibia
Tel: +264 61 71 2066
Fax: +264 61 21 0741

Letter of Invitation

Name and Address of Bidder _____

Procurement Reference Number: G/RFQ/NW-018/2023

23 June 2022

Dear Bidder,

Supply & Delivery of Chemical Dosing equipment and materials for Ovitoto and Omarassa Booster Stations

NamWater invites you to submit your best quote for the items described in detail hereunder.
Any resulting contract shall be subject, to the terms and conditions referred to in the document.

Queries, if any, should be addressed to Procurement Management Unit E-mail:
bids@namwater.com.na, Private Bag 13389 Windhoek, Namibia.

Please prepare and submit your quotation in accordance with the instructions given or inform the undersigned if you will not be submitting a quotation.

Yours faithfully

Procurement Management Unit

SECTION I: INSTRUCTIONS TO BIDDERS

1. Rights of Public Entity

The NamWater Ltd reserves the right:

- (a) to split the contract as per the lowest evaluated cost per item, or
- (b) to accept or reject any quotation; and
- (c) to cancel the quotation process and reject all quotations at any time prior to contract award.

2. Preparation of Quotations

You are requested to quote for the items mentioned in Section III by completing, signing and returning:

- (a) the Quotation Letter in Section II with its annex for Bid Securing Declaration;
- (b) the List of Goods and Price Schedule Section III;
- (c) the Specifications and Compliance Sheet in Section V; and
- (d) Supporting information/literature requested under Section IV, number 8

You are advised to carefully read the complete Request for Sealed Quotations document, including the Special Conditions of Contract in Section VII, before preparing your quotation. The standard forms in this document may be retyped for completion but the Bidder is responsible for their accurate reproduction.

3. Validity of Quotations

The Quotation validity period shall be **90** days from the date of submission deadline.

4. Eligibility Criteria

To be eligible to participate in this Quotation exercise, you should:

- (a) have a company Registration Certificate;
- (b) have a Good Standing Tax Certificate;
- (c) have a Good Standing Social Security Certificate;
- (d) have an Affirmative Action Compliance Certificate, proof from Employment Equity Commissioner that bidder is not a relevant employer, or exemption issued in terms of Section 42 of the Affirmative Action Act, 1998;
- (e) Submit signed Bid-securing Declaration.
- (f) An undertaking on the part of the Bidder that the salaries and wages payable to its personnel in respect of this proposal are compliant to the relevant laws, Remuneration Order, and Award, where applicable and that it will abide to sub-clause 4.6 of the General conditions of Contract if it is awarded the contract or part thereof; and;
- (g) **Supporting** information/literature to substantiate compliance

The obligatory documents indicated above, are acceptable as follows:

- A valid original document; or
- a valid certified copy of an original document, as certified by a Commissioner of Oath appointed in terms of the Justices of the Peace and Commissioners of Oaths Act, 1963 (Act No. 16 of 1963) as amended.

5. Bid Securing Declaration

Bidders are required to subscribe to a Bid Securing Declaration for this procurement process.

6. Delivery

Delivery shall be to a maximum of **12 weeks** after acceptance/issue of Purchase Order. Deviation in delivery period **shall not be accepted**.

The following tests and inspections will be conducted on the goods at delivery:

- 6.1. NamWater Ltd will inspect all items upon delivery to ascertain if dimensions, pressure flange rating and coating are correct. NamWater Ltd will not send a technical person to go inspect the items at the factory, the onus thus rest with the supplier to ensure that all items are to specifications before delivery is made to Aigams Building, NamWater Head Office Stores.

7. Sealing and Marking of Quotations

Quotations should be sealed in a single envelope, clearly marked with the Procurement Reference Number, addressed to NamWater Ltd with the Bidder's name and contact information at the back of the envelope.

8. Submission of Quotations

Quotations should be deposited in the Quotation/Bid Box located at Namibia Water Corporation Ltd Head office, Private Bag 13389, 176 Iscor Street, Aigams Building, Windhoek, not later than **Thursday 07 June 2022** at **11h00**. Offers by post or hand delivered should reach Private Bag 13389 by the same date and time at latest. Late Offers will be rejected

Quotations received by e-mail will not be considered.

9. Opening of Quotations

Quotations will be opened internally by NamWater Ltd immediately after the closing time referred to in instruction 8 above. A record of the Quotation Opening stating the name of the bidders, the amount quoted, the presence or absence of a Bid Securing Declaration, will be posted on the website of NamWater Ltd and available to any bidder on request within three working days of the Opening.

10. Evaluation of Quotations

NamWater shall have the right to request for clarifications in writing during evaluation.

11. Technical Compliance

Bidders shall submit along with their quotations documents, catalogues and any other literature to substantiate compliance with the required specifications and to qualify deviations if any with respect to Public Entity's requirements.

The Specifications, Performance Requirements and Compliance Sheet details the minimum specifications of the goods/items to be supplied. The specifications have to be met but no credit will be given for exceeding the specifications unless otherwise stated.

12. Prices and Currency of Payment

Prices shall be fixed in Namibian Dollars.

13. Margin of Preference

13.1 The applicable margins of preference and their application methodology are as follows: **Not applicable**

14. Award of Contract

The Bidder having submitted the lowest evaluated responsive quotation and qualified to supply the goods/items and related services shall be selected for award of contract. Award of contract shall be by issue of a Purchase Order/Letter of Acceptance in accordance with terms and conditions contained in Section VI: Contract Agreement and General Conditions of Contract.

Partial award will be allowed

15. Notification of Award and Debriefing

NamWater Ltd shall after award of contract promptly inform all unsuccessful bidders in writing of the name and address of the successful bidder and the contract amount and post a notice of award on its website within seven (7) days. Furthermore, NamWater Ltd shall end to all requests for debriefing made in writing within seven (7) days of the unsuccessful bidders being informed of the award.

SECTION II: QUOTATION LETTER

(to be completed by Bidders)

[Complete this form with all the requested details and submit it as the first page of your quotation with the Price list and documents requested above. A signature and authorisation on this form will confirm that the terms and conditions of the RFQ prevail over any attachments. **If your quotation is not authorised, it will be rejected.**]

Quotation addressed to:	Namibia Water Corporation Ltd
Procurement Reference Number:	G/RFQ/NW-018/2023
Subject matter of Procurement:	Supply & Delivery of Chemical Dosing equipment and materials for Ovitoto and Omarassa Booster Stations

We offer to supply the items listed in the attached List of Goods and Price Schedule as per the defined specifications, *except for the qualified deviations [Bidder may delete this phrase in case of no deviation]* and, in accordance with the terms and conditions stated in your Request for Quotations referenced above.

We confirm that we are eligible to participate in this Quotation exercise and meet the eligibility criteria specified in Section 1: Instruction to Bidders.

We undertake to abide ethical conduct during the procurement process and the execution of any resulting contract.

We have read and understood the content of the Bid Securing Declaration (BSD) attached hereto and subscribe fully to the terms and conditions contained therein. We further understand that this subscription could lead to disqualification on the grounds mentioned in the BD].

The validity period of the Quotation is days from the date of the bid submission deadline.

We confirm that the prices quoted in the List of Goods and Price Schedule are fixed and firm and will not be subject to revision or variation, if we are awarded the contract prior to the expiry date of the quotation validity.

The delivery period offered from the date of issue of Purchaser Order/ Letter of Acceptance is as shown in the List of Goods items and Price Schedule.

Quotation Authorised by:

Name of Bidder		Company's Address and seal	
Contact Person			
Name of Person Authorising the Quotation:		Position:	Signature:
Date		Phone No./Fax	

Appendix to Quotation Letter

BID SECURING DECLARATION

(Section 45 of Act)

(Regulation 37(1)(b) and 37(5))

Date:

Procurement Ref No.:

To:

I/We* understand that in terms of section 45 of the Act a public entity must include in the bidding document the requirement for a declaration as an alternative form of bid security.

I/We* accept that under section 45 of the Act, I/we* may be suspended or disqualified in the event of

- (a) a modification or withdrawal of a bid after the deadline for submission of bids during the period of validity;**
- (b) refusal by a bidder to accept a correction of an error appearing on the face of a bid;**
- (c) failure to sign a procurement contract in accordance with the terms and conditions set forth in the bidding document, should I/We* be successful bidder; or**
- (d) failure to provide security for the performance of the procurement contract if required to do so by the bidding document.**

I/We* understand this bid securing declaration ceases to be valid if I am/We are* not the successful Bidder

Signed:
[insert signature of person whose name and capacity are shown]

Capacity of:
[indicate legal capacity of person(s) signing the Bid Securing Declaration]

Name:
[insert complete name of person signing the Bid Securing Declaration]

Duly authorized to sign the bid for and on behalf of: [insert complete name of Bidder]

Dated on _____ day of _____, _____
[insert date of signing]

Corporate Seal (where appropriate)

[Note*: In case of a joint venture, the bid securing declaration must be in the name of all partners to the joint venture that submits the bid.]

***delete if not applicable / appropriate**



Republic of Namibia

Ministry of Labour, Industrial Relations and Employment Creation

Written undertaking in terms of section 138 of the Labour Act, 2015 and section 50(2)(D) of the Public Procurement Act, 2015

1. EMPLOYERS DETAILS

Company Trade Name:.....

Registration Number :.....

Vat Number:

Industry/Sector:

Place of Business:.....

Physical Address:.....

Tel No.:.....

Fax No.:.....

Email Address:.....

Postal Address:.....

Full name of Owner/Accounting Officer:.....

.....

Email Address:.....

2. PROCUREMENT DETAILS

Procurement Reference No.:.....

Procurement Description:

.....

.....

Anticipated Contract Duration:

Location where work will be done, good/services will be delivered:

.....

3. UNDERTAKING

I [insert full name], owner/representative

of[insert full name of company]

hereby undertake in writing that my company will at all relevant times comply fully with the relevant provisions of the Labour Act and the Terms and Conditions of Collective Agreements as applicable.

I am fully aware that failure to abide to such shall lead to the action as stipulated in section 138 of the labour Act, 2007, which include but not limited to the cancellation of the contract/licence/grant/permit or concession.

Signature:

Date:

Seal:.....

Please take note:

1. A labour inspector may conduct unannounced inspections to assess the level of compliance
2. This undertaking must be displayed at the workplace where it will be readily accessible and visible by the employees rendering service(s) in relations to the goods and services being procured under this contract.

3.14	Foot Valve for SeaQuest abstraction PE hose 8/11 mm connection uPVC	1	Each			
3.15	20mm to 50mm Reducer uPVC	2	Each			
3.16	HDG 25mm to 20mm Reducing Bush	3	Each			
3.17	HDG 20mm Hex Nipple	3	Each			
3.18	Ball Valve 20mm Threaded Female Connections (Brass/Steel)	2	Each			
	Delivery [Weeks]				TOTAL	
	Validity period (minimum 90 days)					
NAME:		POSITION:		SIGNATURE		DATE
NAME OF BIDDER:		ADDRESS:				

3. If Price quoted is subject to change in rate of exchange at the time of delivery of goods provide details hereunder:

Currency : Exchange Rate:

If no base rate of exchange is given, the price shall be treated as firm in Namibian Dollars for all intent and purpose.

Key notes: **NA**=NOT APPLICABLE, **NQ**=NO QUOTE

SECTION IV: SPECIFICATIONS AND PERFORMANCE REQUIREMENTS

GENERAL

These specifications are a supplement to the relevant specifications as listed below, and will in no way relieve the supplier of the requirements of the relevant specifications.

- **ASTM D 1785**

Standard specification for pipes in PVC, Sch. 40-80-120

- **ASTM D 2464**

Standard specification for threaded polyvinyl chloride (PVC) plastic pipe fittings

- **ASTM D 2467**

Standard specification for polyvinyl chloride (PVC) plastic pipe fittings, sch. 80

- **BS 10**

Specification for flanges and bolting for pipes, valves and fittings

- **BS 21**

Specification for pipe threads for tubes and fittings

- **BS 3505**

Specification for PVC-U pressure pipes for cold water supplies

- **BS 3506**

Specification for PVC-U pipes for industrial use

- **BS 4346-1**

Joints and fittings for use with solvent weld PVC pressure pipes

- **DIN 2501**

Flange dimensions and drilling

- **DIN 2999**

Whitworth pipe threads for threaded pipes and fittings

- **DIN 8062**

PVC-U pipes - dimensions

- **DIN 8063**

PVC-U pipe fittings - dimensions

- **DVS 2204 - DVS 2221**

Adhesive bonding of thermoplastic PVC-U pipes and fittings

- **EN 1092-1**

Flanges and their joints - Circular flanges for pipes, fittings, valves and accessories - Part 1: PN designated steel flanges

- **EN ISO 1452**

PVC-U pipes and fittings for water supply systems

- **EN ISO 15493**

Plastic piping systems (Pipes, Fittings and Valves) in ABS, PVC-U, PVC-C for industrial applications

- **ISO 7**

PVC-U fittings with pressure-tight threaded joints

- **ISO 161-1**

Dimensions of PVC-U pipes and fittings, metric series

- **ISO 228-1**

PVC-U pipe fittings with threaded joints

- **ISO 727**

PVC-U pipes and fittings Dimensions and tolerances, metric series

- **JIS K 6741**

PVC-U pipes

- **JIS B 0203**

Tapered pipe threads

- **JIS K 6743**

PVC-U pipe fittings for water supply systems

- **UNI 11242**

Solvent welding of PVC-U pipes, fittings and valves

- **SANS 10298:2009**

Indirect small to medium-sized gas chlorination systems for the disinfection of water

Bidders are encouraged to submit primary and alternative offers provided that the offers are in full compliance with the technical specifications, and that supporting literature verifying compliance is submitted.

AFTER SALES SERVICES

An authorized service agent capable of servicing the offered equipment must be located in Namibia.

TRANSPORT, STORAGE & HANDLING

The items shall be adequately packaged and supported during transit to ensure the items are not subjected to undue damages or stress.

LOT 1: TECHNICAL SPECIFICATIONS

ITEM 1: CHEMICAL DOSING BOARD

General Construction and Performance Requirements

The chemical dosing board shall comprise of the components listed below:

- 1.1. Two diaphragm dosing pumps *
- 1.2. Two 20NB Servo-assisted 2/2-way diaphragm valve (Solenoid Valve) *
- 1.3. One 20NB uPVC strainer (upstream of solenoid valves)*
- 1.4. Six 20NB uPVC ball valves (isolation valves for PE hose lines)
- 1.5. One 20NB uPVC union

* An electronic copy of operating and maintenance manuals shall be supplied with delivery.

The uPVC components shall have end connections suitable for solvent welding. The components complete with piping and tubing shall be installed onto a **20mm thick uPVC board** no larger than 1300 x 800mm as illustrated in the accompanying drawing of the proposed dosing board. The contractor shall fit the appropriate piping ~, hose ~, and equipment clamps and brackets to fix the piping, tubing and equipment to the uPVC board securely enough for transport and handling.

A final design drawing of the board shall be submitted for approval if the board is not to be constructed as per layout of the proposed drawing.

ITEM 1.1: DIAPHRAGM DOSING PUMP

The dosing pumps shall be required to dose SeaQuest at a rate of 0.13 L/h at a pressure of approximately 10mWh.

Construction & Operational Requirements

- The pumps will be operated in a 1+1 configuration
- The pumps will be required to draw SeaQuest from a dosing tank below the pumps.
- Remote on/off control of the pump should be possible
- Manual input of the flow rate should be possible
- Analog control 4-20 mA input & output
- Low level and empty tank sensors with auto shutoff
- Auto deaeration during pump standby
- Counter for total dosed volume (resettable), operating hours
- Ambient temperature range: 0 - 45°C
- Minimum IP65

Materials of Construction

Component	Material Specifications
Pump Housing	Stainless steel 316
Gasket	PTFE
Diaphragm	PTFE
Valve Ball	Stainless steel 316
Dosing head	Stainless steel 316

ITEM 1.2: 20NB Servo-assisted 2/2-way diaphragm valve

- 24V DC
- Normally closed
- Minimum differential pressure required to open: 0 bar
- Maximum operating pressure: 4 bar
- Ambient temperature: 0 - 45°C
- Media (water) temperature: 0 - 40°C
- Union connections
- Body material: PVC
- Diaphragm material and O-rings: EPDM or FKM
- Maximum opening response time: 5 seconds
- Maximum closing response time: 5 seconds
- IP65 Rated

- $\pm 10\%$ voltage tolerance
- Duty cycle: 100%
- Coil insulation class: H
- Supplied complete with cable plug
- Datasheets provided to confirm compliance

LOT 2: TECHNICAL SPECIFICATIONS

ITEM 2.1: CHEMICAL STORAGE TANK

- 0.25 m³ capacity
- Made of clear LLDPE
- Decanting opening of minimum diameter 150 mm, with screw top
- Capable of fitting through standard doorway (860 mm)

ITEM 2.2: BUND/ SPILL BAY

- Suitably sized to hold offered chemical storage tank (**Item 2.1**)
- Made of clear LLDPE
- Capable of fitting through standard doorway (860 mm)

ITEM 2.3: CHEMICAL STORAGE TANK

- 1.0 m³ capacity
- Made of clear LLDPE
- Decanting opening of minimum diameter 150 mm, with screw top
- Capable of fitting through standard doorway (860 mm)

ITEM 2.4: BUND/ SPILL BAY

- Suitably sized to hold offered chemical storage tank (**Item 2.3**)
- Made of clear LLDPE
- Capable of fitting through standard doorway (860 mm)

ITEMS 2.5: 400KG+ Electronic Chemical Scale

- Scale shall be suitable for a 400 kg load.
- Platform shall be sized to accept the bund/ spill tray (**Item 2.2**).

ITEMS 2.6: 1,500KG+ Electronic Chemical Scale

- Scale shall be suitable for a 1,500 kg load.
- Platform shall be sized to accept the bund/ spill tray (**Item 2.4**).

*ITEMS 2.5 AND 2.6: Electronic Chemical Scale***General and Construction Requirements**

- Load cell shall be mechanically sealed with O-rings. Potted-type load cells shall **not** be accepted.
- Platform scale coating system shall be resistant to moisture, chemicals, abrasion, impact and UV light with a minimum dry thickness of 2mm.
- Each Scale Platform **must have its own** Indicator Monitor.
- Load cell system shall be immune to all RFI (Radio Frequency Interference) or EMI (Electromagnetic Interference), power failures and lightning strikes.
- Dial shall be temperature stable with damper installed to prevent shock damage during container loading.
- Provided with **a 4-20mA output signal for each scale**.
- Re-calibration of the scales should not be required at each change container.
- The remote mounted LCD indicator shall carry the CE marking and shall be housed in a NEMA 4X, UL approved enclosure. All operations shall be keypad operated & menu driven in order to avoid compromising the NEMA 4X seal at any time. The alphanumeric LCD readout shall have backlighting for readability in low light conditions. Power requirement shall be 24V DC.
- A six-digit numerical display shall give operator the ability to monitor the chemical by weight (kg) or volume (litres). A bar graph display shall read 0-100% for the net contents. A dual mode TARE key shall allow user to enter the tare weight of the vessel or enter the net weight of the chemical depending on application needs. A diagnostics menu shall allow recalibration without the need to apply field test weights. A user adjustable filter function shall stabilize display in the event of vibration from pumps or mixers in the immediate vicinity of the scale. The full-scale accuracy shall be 0.25% or better.
- The indicator shall output net weight via a 4-20mA signal and full-scale output shall be user adjustable via the keypad. Indicator shall have four adjustable set points to display low or high level conditions on the indicator.
- Flexible cable shall connect load cell to indicator, cable minimum length of 6m.
- The scale shall carry a Full Five (5) Year Factory Warranty. “Limited” Warranties shall **not** be acceptable.

LOT 3: TECHNICAL SPECIFICATIONS

ITEMS 3.1-3.18: Materials

General and Construction Requirements

- The size of the valve or fitting specified shall denote that of the end connections.
- All items shall be readily available off-the-shelf items.

SECTION V: SPECIFICATIONS AND COMPLIANCE SHEET

Procurement Reference Number: **Procurement Ref No. G/RFQ/NW-018/2023**

Bidders should complete column C with the specification of the goods offered and **attach annexures with detailed technical literature substantiating compliance**. Offers of equipment failing to comply with one or more of the specifications shall be disqualified. **Failure to complete column C of the Specifications and Compliance Sheet shall result in disqualification.**

CHEMICAL DOSING BOARD (LOT 1)

Technical Admissibility Verification: *CHEMICAL DOSING BOARD*

<i>Item No</i>	<i>Technical Specification Required</i>	<i>Technical Specification Offered</i>	<i>Offer Complies</i>	
			<i>Yes</i>	<i>No</i>
<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>
1.1	Suitable for drawing SeaQuest from a dosing tank below the pumps			
	Remote on/off control of the pump possible			
	Manual input of the flow rate possible			
	Analog control 4-20 mA input & output			
	Low level and empty tank sensors with auto shutoff			
	Auto deaeration during pump standby			
	Counter for total dosed volume (resettable), operating hours			
	Suitable for ambient temperature range: 0 - 45°C			
	Minimum IP65			
	PE hose 8/11 mm vacuum line connection			

	Materials as specified			
	Datasheets provided to confirm compliance			
1.2	24V DC			
	Normally closed			
	Minimum operating pressure: 0 bar (required to open)			
	Ambient temperature: 0 - 45°C			
	Suitable for media (water) temperature: 0 - 40°C			
	Union connections			
	Body material: PVC			
	Diaphragm material and O-rings: EPDM or FKM			
	Maximum opening response time: 5 seconds			
	Maximum closing response time: 5 seconds			
	IP65 Rated			
	±10% voltage tolerance			
	Duty cycle: 100%			

	Coil insulation class: H			
	Supplied complete with cable plug			
	Datasheets provided to confirm compliance			
1	All other components as specified			
	Electronic copy of operating and maintenance manuals supplied at delivery where applicable			

Additional Information Required:

Make & model of dosing pump	
Spares Service agent in Namibia Dosing Pump	
Make & model of servo assisted diaphragm valve	
Spares Service agent in Namibia Servo assisted diaphragm valve	

Specifications and Compliance Sheet Authorized By:

Name:		Signature:	
Position:		Date:	
Authorized for and on behalf of:		Company	

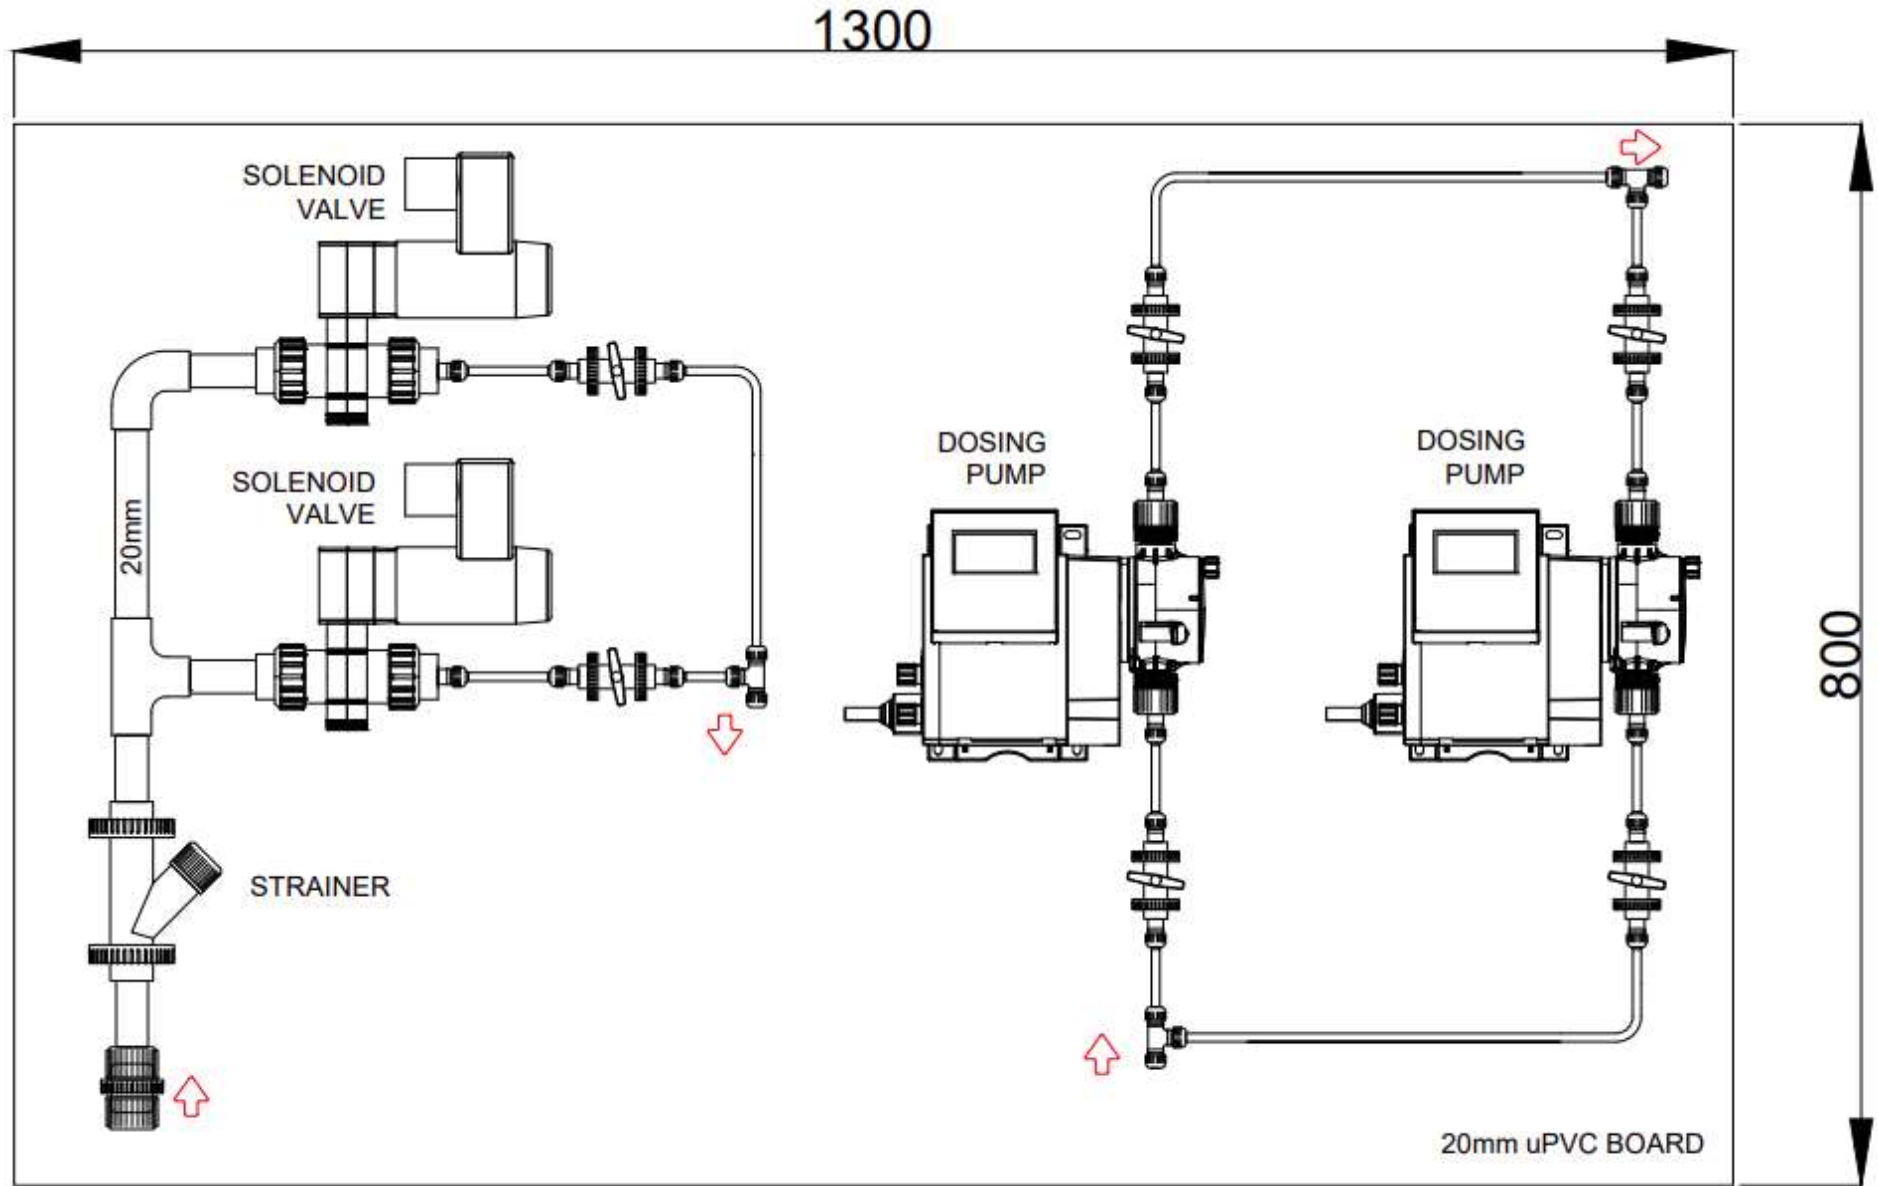


Figure 1: Lot 1 Chemical Dosing Board

CHEMICAL STORAGE (LOT 2)

Technical Admissibility Verification: *CHEMICAL STORAGE AND ELECTRONIC CHEMICAL SCALES*

<i>Item No</i>	<i>Technical Specification Required</i>	<i>Technical Specification Offered</i>	<i>Offer Complies</i>	
			<i>Yes</i>	<i>No</i>
<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>
2.1	0.25 m ³ capacity			
	Made of clear LLDPE			
	Decanting opening of minimum diameter 150 mm, with screw top			
	Able to pass through standard doorway (860 mm)			
2.2	Suitably sized to hold offered chemical storage tank (Item 2.1)			
	Made of clear LLDPE			
	Able to pass through standard doorway (860 mm)			
2.3	1.0 m ³ capacity			
	Made of clear LLDPE			
	Decanting opening of minimum diameter 150 mm, with screw top			

	Able to pass through standard doorway (860 mm)			
2.4	Suitably sized to hold offered chemical storage tank (Item 2.3)			
	Made of clear LLDPE			
	Able to pass through standard doorway (860 mm)			
2.5	Scale suitable for a 400 kg load			
	Platform suitably sized to accept the bund/ spill tray (Item 2.2)			
2.6	Scale suitable for a 1,500 kg load			
	Platform suitably sized to accept the bund/ spill tray (Item 2.4)			
2.5 & 2.6	Load cell mechanically sealed with O-rings			
	Platform scale coating system as specified			
	Load cell system is immune to all RFI or EMI, power failures and lightning strikes			
	Dial is temperature stable with damper installed to prevent shock damage during container loading			
	Re-calibration of the scales not required at each change container			

	LCD indicator carries the CE marking and is housed in a NEMA 4X, UL approved enclosure.			
	All operations keypad operated & menu driven in order to avoid compromising the NEMA 4X seal			
	Power requirement shall be 24V DC			
	Six-digit numerical display as per specifications			
	Diagnostics menu that allows recalibration without the need to apply field test weights			
	Full-scale accuracy 0.25% or better			
	4-20mA signal and full-scale output user adjustable via the keypad			
	Flexible cable connection between load cell and indicator, cable minimum length of 6m			
	Full Five (5) Year Factory Warranty			
2	Datasheets provided to confirm compliance			

Additional Information Required:

Make & model offered: Item 2.5	
Make & model offered: Item 2.6	
Spares Service agent in Namibia	

Specifications and Compliance Sheet Authorized By:

Name:		Signature:	
Position:		Date:	
Authorized for and on behalf of:		Company	

MATERIALS (LOT 3)

Technical Admissibility Verification: *MATERIALS*

<i>Item No</i>	<i>Technical Specification Required</i>	<i>Technical Specification Offered</i>	<i>Offer Complies</i>	
			<i>Yes</i>	<i>No</i>
<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>
3.1- 3.18	uPVC equipment and materials shall have end connections suitable for solvent welding			
	Compliance with general standards where applicable			

Additional Information Required:

uPVC Spares Service agent in Namibia	
--------------------------------------	--

Specifications and Compliance Sheet Authorized By:

Name:		Signature:	
Position:		Date:	
Authorized for and on behalf of:		Company	

All Tenders shall be accompanied with detailed supporting literature for all couplings to enable Namwater to evaluate the conformity to specification and include additional features.

Offers with insufficient details or information will not be considered.

NOTE:

Offers will be disqualified if this information is not included in the tender documents. Only original documentation is acceptable and faxed copies of literature are unacceptable. Information supplied in an electronic format will be accepted if in PDF format on a CD.

SECTION VI: GENERAL CONDITIONS OF CONTRACT AND CONTRACT AGREEMENT

Any resulting contract shall be placed by means of a Purchase Order/Letter of Acceptance and shall be subject to the General Conditions of Contract (GCC) for the Procurement of Goods (Ref. **G/RFQ-GCC**) available at Namibia Water Corporation Ltd., physical address, 176 Iscor Street, Aigams Building, Windhoek, except where modified by the Special Conditions below

SECTION VI: CONTRACT AGREEMENT

Any resulting contract shall be placed by means of a Purchase Order/Letter of Acceptance and shall be subject to the General Conditions of Contract (GCC) for the Procurement of Goods except where modified by the Special Conditions below.

SECTION VIII: SPECIAL CONDITIONS OF CONTRACT

Procurement Reference Number: **G/RFQ/NW-018/2023**

The clause numbers given in the first column correspond to the relevant clause number of the GCC.

Subject and GCC clause reference	Special Conditions
Site GCC 1.1(m)	The Site/final destination for delivery of the Goods is 176 Iscor Street NamWater at the Aigams Building, Northern Industrial Area in Windhoek
Incoterms Edition GCC 4.2(b)	Incoterms shall be governed by the rules prescribed in Incoterms 2010.
Notices GCC 8.1	Any notice shall be sent to the following addresses: For NamWater Ltd the address and the contact name shall be: Procurement Management Unit (Tel: +264 61 71 2009), E-mail: bids@namwater.com.na Private Bag 13389 Windhoek, Namibia For the Supplier, the address and contact name shall be: _____

Subject and GCC clause reference	Special Conditions
Delivery and Documents GCC 13.1	<p>The Goods are to be delivered within 12 weeks from the date of Purchase Order or Letter of Acceptance.</p> <p>The documents to be furnished by the Supplier are:</p> <ul style="list-style-type: none"> (a) signed delivery note; (b) Invoice
Terms of Payment GCC 16.1	<p>The structure of payments shall be: full payment following delivery of the Supplies and submission of an invoice and the documents listed in clause 13.1</p>
Terms of Payment GCC 16.3	<p>Payments shall be made not later than thirty days after submission of an invoice and its certification by the Purchaser.</p> <p>Payment will only be made if all the delivered items are to specifications</p>
Terms of Payment GCC 16.4	<p>The currency of payment shall be the currency of order specified in the List of Goods, Price Schedule and Product details in the Statement of Requirements.</p>
Packing GCC 23.2	<p>The packing, marking and documentation within and outside the packages shall be:</p> <p>Addressed to NamWater and the Procurement reference No. clearly marked. Good should be in protective packaging for safety.</p>
Insurance GCC 24	<p>The insurance should be covered as described in Delivery Duty Paid (DDP)</p>
Transportation GCC 25	<p>The Goods shall be delivered: Delivery Duty Paid (DDP)</p>
Inspection and Tests GCC 26.	<p>NamWater will inspect all items upon delivery to ascertain if dimensions, pressure flange rating and coating are correct. NamWater will not send a technical person to go inspect the items at the factory, the onus thus rest with the supplier to ensure that all items are to specifications before delivery is made to NamWater.</p> <p>Payment will only be made if all the delivered items are to specifications.</p>
Liquidated Damages GCC 27	<p>Liquidated damages for the whole contract are 0.5% per day. The maximum amount of liquidated damages for the whole contract is 10% of the final contract price.</p>

Subject and GCC clause reference	Special Conditions
<p>Warranty GCC 28.3</p>	<p>The warranty period shall be 18 months from date of delivery or 12 months from date of commissioning, whichever occurs first. The Supplier shall rectify, free of charge, any defects developing under proper use and arising solely from faulty materials, faulty designs, faulty workmanship and unacceptable deviation from performance criteria as specified in this document.</p> <p>Should any repairs, rectifications and/or component replacements be conducted as warrantee claims, the warrantee period shall be extended equal to the duration required to complete the respective repairs, rectifications and/or component replacements as measured from the date of the claim submission until delivery to NamWater.</p> <p>All components affected by any repairs, rectifications and/or component replacements conducted as warrantee claims, shall, following the repair, rectification and/or component replacement, remain under warrantee for 12 months after delivery to NamWater or 6 months after reinstallation and commissioning, whichever occurs first.</p> <p>The Supplier shall transfer the benefit of any and all periods of warrantee by the manufacturer of the equipment, which may be un-expired at the end of the above warrantee period (s), to NamWater.</p>
<p>Repair and Replacement GCC 28.5</p>	<p>The period for repair or replacement shall be as soon as is reasonably practicable, but shall not exceed the offered delivery period.</p>

SCHEDULE 1

QUOTATION CHECKLIST SCHEDULE

Procurement Reference No.: G/RFQ/NW-018/2023

Description	Attached	Not Attached
Quotation Letter		
List of Goods and Price Schedule		
Specifications Compliance Sheet		
Evidences for conformity of Goods		
Valid company Registration Certificate Copy from Ministry of Trade and Industry		
Original valid good standing Tax Certificate from Inland Revenue or a valid certified copy of an original certified by the Namibian Police of good standing Tax Certificate		
Original valid good Standing Certificate from Social Security Commission or a valid certified copy of an original certified by the Namibian Police of good standing Tax Certificate		
Valid Affirmative Action Compliance Certificate, proof from Employment Equity Commissioner that bidder is not a relevant employer, or exemption issued in terms of Section 42 of the Affirmative Action Act, 1998;		
Supporting information/literature.		

Disclaimer: The list defined above is meant to assist the Bidder in submitting the relevant documents and shall not be a ground for the bidder to justify its non-submission of major documents for its quotation to be responsive. The onus remains on the Bidder to ascertain that it has submitted all the documents that have been requested and are needed for its submission to be complete and responsive.